
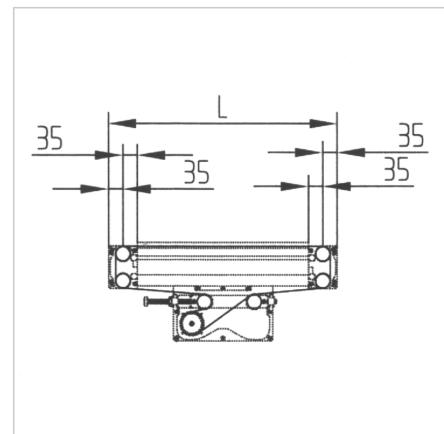


## BASE TRACK L= WITH OUT DRIVE UNIT AND PULLEYS

Code: 430020/0

[Link to the product →](#)

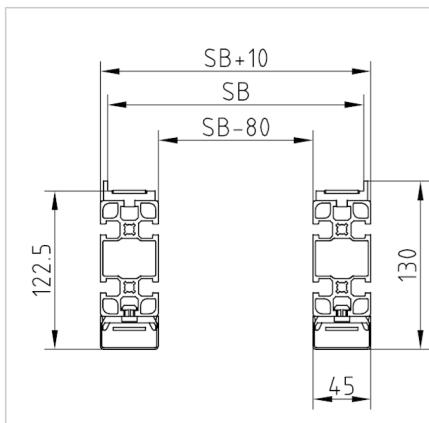

Technical data/items supplied	Applications	Assembly
<ul style="list-style-type: none"> <li>Profile 45 x 90F, anodized, E6/EV1</li> <li>Sliding strip made of PE, black, extremely abrasion resistant, L max: 2 m</li> <li>Cover profile for belt return with clip fastening</li> <li>Timing belt for drive (transport belt)</li> <li>Spreading width (SB): universal</li> <li>Route length = L-140 mm</li> <li>Track length min. 270 mm</li> <li>Track length min. 4000 mm</li> </ul>	<ul style="list-style-type: none"> <li>Implementation in all TSG transfer systems</li> <li>Max. track load depending on drive concept</li> <li>When exceeding the total load per section, please devide into several sections</li> <li>Calculation formula for timing belt length: (Timing belt included in scope of supply) Timing belt length <math>(L - 70) \times 2 + 473</math> mm round up to 5 mm pitch</li> </ul>	<ul style="list-style-type: none"> <li>Screw the basic distance with supports</li> <li>After attachment of drive unit, diversions and timing belts, clip cover profile onto underside of profile</li> <li>Free profile grooves for attaching stoppers, sensors, switches, ect. With standard screws</li> </ul>