

+386 (0)59 071 390
prodaja@minitec.si
03.11.2026


BASE TRACK L= WITH OUT DRIVE UNIT AND PULLEYS

Code: 430020/0

Link to the product →

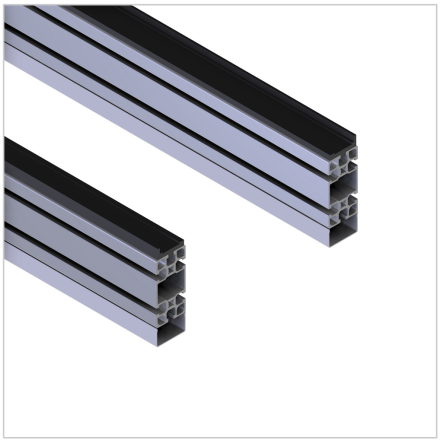

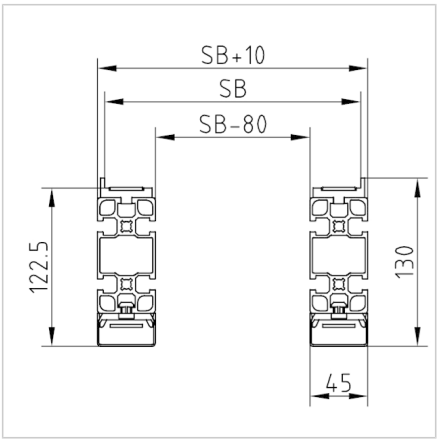

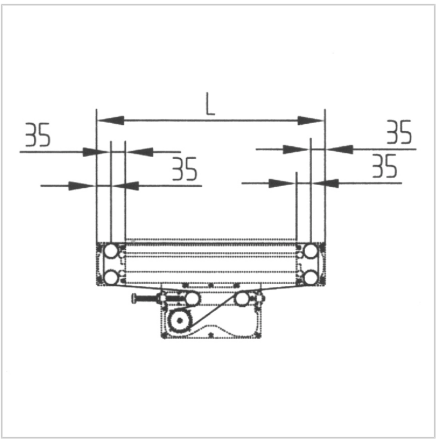

Technical data/items supplied

- Profile 45 x 90F, anodized, E6/EV1
- Sliding strip made of PE, black, extremely abrasion resistant, L max: 2 m
- Cover profile for belt return with clip fastening
- Timing belt for drive (transport belt)
- Spreading width (SB): universal
- Route length = L-140 mm
- Track length min. 270 mm
- Track length min. 4000 mm

Applications

- Implementation in all TSG transfer systems
- Max. track load depending on drive concept
- When exceeding the total load per section, please devide into several sections
- Calculation formula for timing belt length: (Timing belt included in scope of supply) Timing belt length (L - 70) x 2 + 473 mm round up to 5 mm pitch

Assembly

- Screw the basic distance with supports
- After attachment of drive unit, diversions and timing belts, clip cover profile onto underside of profile
- Free profile grooves for attaching stoppers, sensors, switches, ect. With standard screws