
+386 (0)59 071 390
prodaja@minitec.si
03.11.2026


FOOT M08 D80 L=69 ESD

Code: 321021/0

Adjustable foot M08 D80 L=69 with ESD protection for stable and secure fastening of aluminium structures in ESD-sensitive industrial environments.

Link to the product →

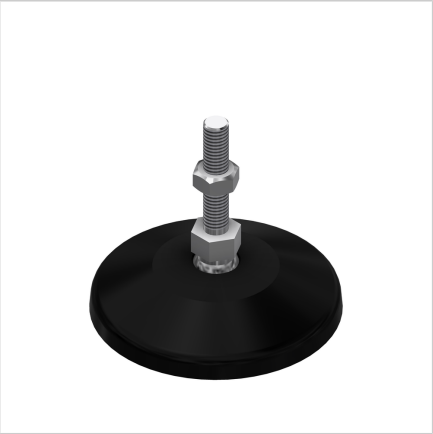

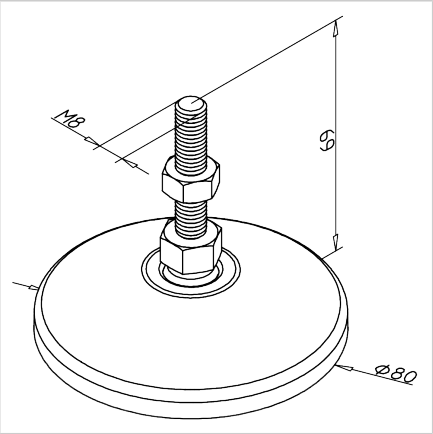



Technical data/items supplied

- Plate PA, black
- Anti-slip insert
- Spindle steel, galvanized
- Counter nut, steel, zinc plated
- Conductive
- Hinged foot ESD D=80 m with spindle M10 **part no**. 321012/0
- Max. load capacity: 900 kg
- Weight = 0.108 kg/piece

Applications

- Height adjustable heavy constructions of all types
- Guards, tables, show cases, Conveying systems, workstations

Assembly

- For profiles 45 x 90 und 90 x 90 a base and transport plate is required, if the feet are to be positioned centrally.
- Directly in the central bore of the profile (can be drilled with thread up to M12)
- Larger threads in connection with connection plate